


TUBERIA HN REDONDA

Tubería H.N. redonda

Materia prima:

ASTM- A569. Laminado en caliente

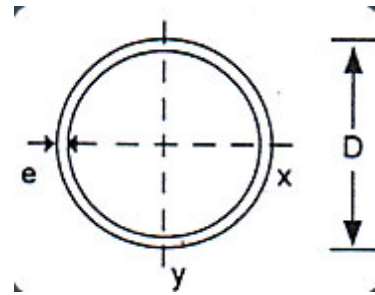

DIAMETRO NOMINAL (Pulgadas)	DIAMETRO EXTERNO (mm)	ESPESOR (mm)	LONGITUD (Mts)	PESO		SECCIÓN cm2	I cm4	S cm3	R cm
				Kg/m	Kg/Pieza				
1/2	20.00	2.00	6.00	0.906	5.436	1.13	0.464	0.464	0.64
3/4	26.00	2.00	6.00	1.207	7.242	1.51	1.093	0.841	0.85
1	32.00	2.00	6.00	1.494	4.964	1.88	2.130	1.331	1.06
1	32.00	2.30	6.00	1.718	10.308	2.15	2.380	1.488	1.05
1	32.00	2.60	6.00	1.942	11.652	2.40	2.615	1.634	1.04
1 1/4	41.30	2.30	6.00	2.255	13.530	2.82	5.376	2.604	1.38
1 1/4	41.30	2.60	6.00	2.549	15.294	3.16	5.945	2.879	1.37
1 1/2	47.60	2.30	6.00	2.622	15.732	3.28	4.842	3.542	1.60
1 1/2	47.60	2.60	6.00	2.945	17.670	3.68	9.351	3.927	1.59
1 1/2	47.60	2.90	6.00	3.306	19.836	4.07	10.214	4.292	1.58
2	60.30	2.30	6.00	3.357	20.142	4.19	17.637	5.856	2.05
2	60.30	2.60	6.00	3.775	22.650	4.72	19.679	6.524	2.04
2	60.30	2.90	6.00	4.233	25.398	5.23	21.592	7.162	2.03
2 1/2	73.00	2.60	6.00	4.066	24.396	5.75	35.711	9.781	2.49
2 1/2	73.00	2.90	6.00	5.137	30.822	6.39	39.297	10.766	2.46
3	88.90	2.90	6.00	6.273	37.638	7.84	72.518	16.315	3.04
4	114.30	2.90	6.00	8.126	48.756	10.15	157.543	27.567	3.94